

UNCLASSIFIED

AD NUMBER	
AD347534	
CLASSIFICATION CHANGES	
TO:	UNCLASSIFIED
FROM:	CONFIDENTIAL
LIMITATION CHANGES	
TO: Approved for public release; distribution is unlimited.	
FROM: Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; 1963. Other requests shall be referred to Assistant Chief of Staff Force Development , Department of the Army, Washington, DC 20310.	
AUTHORITY	
OACSFOR D/A ltr, 13 Sep 1973; OACSFOR D/A ltr, 13 Sep 1973	

THIS PAGE IS UNCLASSIFIED

GENERAL DECLASSIFICATION SCHEDULE

**IN ACCORDANCE WITH
DOD 5200.1-R & EXECUTIVE ORDER 11652**

THIS DOCUMENT IS

CLASSIFIED BY _____

**Subject to General Declassification Schedule of
Executive Order 11652-Automatically Downgraded at
2 Years Intervals- DECLASSIFIED ON DECEMBER 31, _____.**

BY

**Defense Documentation Center
Defense Supply Agency
Cameron Station
Alexandria, Virginia 22314**

~~CONFIDENTIAL~~

347534


AD

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTICE:

THIS DOCUMENT CONTAINS INFORMATION
AFFECTING THE NATIONAL DEFENSE OF
THE UNITED STATES WITHIN THE MEAN-
ING OF THE ESPIONAGE LAWS, TITLE 18,
U.S.C., SECTIONS 793 and 794. THE
TRANSMISSION OR THE REVELATION OF
ITS CONTENTS IN ANY MANNER TO AN
UNAUTHORIZED PERSON IS PROHIBITED
BY LAW.

CONFIDENTIAL

ARMY CONCEPT TEAM IN VIETNAM
APO 143, San Francisco, California

ACTIV-GM

SUBJECT: [Additional Armament for the M113 APC in Vietnam] JC

TO: See Distribution

347534

1. A requirement exists for added firepower for the M113 when it is used in a counterinsurgency role. This requirement is presently being satisfied by mounting an M1919A4 Caliber .30 machine gun on the left and/or right side of the vehicle's cargo hatch. A standard ground mount is tied with web straps or wire to the vehicle footman loops and antenna guards (See Incl 1, Figures 1 & 2).

2. In an attempt to develop a satisfactory vehicle mount, a comparative evaluation of 3 test mounts was conducted. Their respective elevation, depression, traverse capabilities, and resultant dead space were compared. A listing of all equipment used during the evaluation follows:

- a. M1919A4 Machine Gun.
- b. M60 Machine Gun.
- c. Three-position Pedestal Mount Base - This item was fabricated by the US Army Arsenal, Rock Island, Ill (See Incl 1, Figure 3).
- d. Slotted Adapter - This item was developed for the test by the US Army Concept Team in Vietnam (See Incl 1, Figure 4).
- e. Support Assembly, OPN 10909992 - Standard (See Incl 1, Figure 5).
- f. Modified Support Assembly - Same as para e but reduced 1 inch in height to compensate for height of items c & d above (See Incl 1, Figure 5).
- g. Gunner's Platform - A wooden box, 7 inches in height, to allow a gunner of average height to man the machine gun comfortably.
- h. M1 Aiming Circle - Used for measuring traverse.
- i. M1 Gunner's Quadrant - Used for measuring elevation and depression.

CONFIDENTIAL

FEB 20 1964

CONFIDENTIAL

ACTIV-GM

SUBJECT: Additional Armament for the M113 APC in Vietnam

j. Tape Measure - Used for measuring dead space between bullet impact and vehicle hull.

3. Each of the 3 test mounts was evaluated while positioned on the right side of the top deck centered on the cargo hatch. Test results follow:

a. Three-position Pedestal Mount Base: The machine guns (M1919A4 & M60) were mounted on the modified support assembly (See para 2b above). The M1919A4 used a standard pintle, cradle, and ammunition tray assembly (See Incl 1, Figure 6). The M60 used a locally fabricated pintle assembly (See Incl 1, Figures 7 & 8) with a standard M60 platform assembly. Measurements were taken with the machine gun in the inboard position (closest to the cargo hatch), outboard position (closest to outer edge of vehicle), and center position (point between outboard & inboard position). The results are as follows:

(1) M1919A4:	<u>Inboard</u>	<u>Center</u>	<u>Outboard</u>
(a) Depression	-463M	-463M	-463M
(b) Elevation	+943M	+926M	+890M
(c) Traverse	2723M	2634M	2492M
(d) Dead Space	13' 5"	13' 10"	14'
(2) M60:			
(a) Depression	-427M	-605M	-890M
(b) Elevation	+837M	+605M	+463M
(c) Traverse	3000M	2818M	2500M
(d) Dead Space	9' 3"	7' 4"	6' 3"

(For a graphic portrayal of test results, See Incl 1, Figures 9, 10, 11 and 12).

b. Slotted Adapter: This mount features 14 possible positions within its channel for positioning the machine gun. Both the M1919A4 and the M60 were used with the same equipment mentioned in para 3a. Measurements were taken in the inboard, center, and outboard positions. The results are as follows:

Approved for Release by NSA on 08-27-2014 pursuant to E.O. 13526

CONFIDENTIAL

CONFIDENTIAL

ACTIV-GM

SUBJECT: Additional Armament for the M113 APC in Vietnam

(1) M1919A4:	<u>Inboard</u>	<u>Center</u>	<u>Outboard</u>
(a) Depression	-463M	-463M	-463M
(b) Elevation	+1371M	+1282M	+1032M
(c) Traverse	2723M	2634M	2492M
(d) Dead Space	13' 11"	13' 7"	13' 3"
(2) M60:			
(a) Depression	-641M	-837M	-890M
(b) Elevation	+748M	+712M	+587M
(c) Traverse	2759M	2688M	2207M
(d) Dead Space	9' 3"	7' 4"	6' 3"

(For a graphic portrayal of test results, See Incl 1, Figures 13, 14, 15, and 16.)

c. Standard Support Assembly, OPN 10909992: The M1919A4 and M60 were mounted and tested individually on a standard support assembly. The support assembly was centered on the cargo hatch, midway between the cargo hatch opening and side of the vehicle. This position approximates the center position of the other 2 test mounts. Results were as follows:

	<u>M1919A4</u>	<u>M60</u>
(1) Depression	-463M	-712M
(2) Elevation	+837M	+659M
(3) Traverse	2528M	2723M
(4) Dead Space	13' 8"	8' 11"

(For a graphic portrayal of these measurements, See Incl 1, Figures 17 and 18).

4. The advantages and disadvantages of each test mount follow:

a. Pedestal Mount Base:

(1) Advantages:

(a) Can be welded to top deck.

CONFIDENTIAL

CONFIDENTIAL

ACTIV-GM

SUBJECT: Additional Armament for the M113 in Vietnam

- (b) Offers 3 positions.
- (c) Relatively inexpensive.
- (d) No repair parts and special tools required.
- (e) Slight advantage in depression, elevation, traverse, and dead space over the standard support assembly.

(2) Disadvantages:

- (a) Aluminum mounting plate may require inserts for holes to accept steel bolts.
- (b) Lacks flexibility because 4 mounting bolts must be removed and reinserted to change the position of the gun.
- (c) Mounting holes would be difficult to keep clean for quick-change feature.
- (d) Test results indicate that this mount is slightly inferior in elevation and dead space measurements to the slotted adapter.

b. Slotted Adapter:

(1) Advantages:

- (a) Offers flexibility because of the several locking positions within its channel.
- (b) Is equal to the pedestal mount base and has minor advantages in all measurements over the standard pintle assembly when mounting the M1919A4 (See Test Results, para 3).
- (c) Offers slight advantage to other tested mounts when mounting the M1919A4 (See Test Results, para 4).

(2) Disadvantages:

- (a) Will be more expensive than the other tested items because of the extensive machining required.
- (b) Would require maintenance and lubrication.
- (c) Would be difficult to keep the channel and locking holes clean for smooth operation.

CONFIDENTIAL

ACTIV-CM

SUBJECT: Additional Armament for the M113 in Vietnam

c. Standard Support Assembly:

(1) Advantages:

- (a) Uses standard assembly readily available in the supply system.
- (b) Can be bolted to the top deck without an adapter.
- (c) Least expensive of 3 mounts tested.
- (d) Simplicity and ruggedness assure little maintenance or supply support.


(2) Disadvantages:

- (a) Least flexible of 3 mounts tested.
- (b) Offers least elevation, depression, and traverse, and creates the greatest dead space of the 3 mounts tested.

5. Conclusions: The angles of depression, elevation and traverse and the amount of dead space realized, differ slightly with each of the mounts tested. However, all mounts tested presented characteristics that adequately satisfy the stated requirement. A review of the comparative measurements versus cost, simplicity, ease of operation, ease of maintenance, and repair parts support, indicates that the use of the standard support assembly bolted to the top deck is the most practical solution to this requirement.

6. Recommendation: That the standard support assembly, unmodified, be used as the mount to satisfy the requirement.

1 Incl
a/s

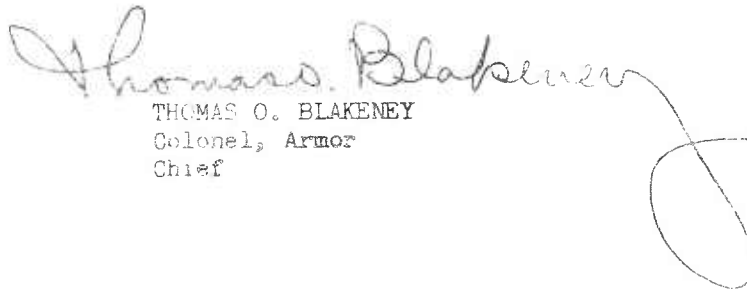
THOMAS O. BLAKENEY
Colonel, Armor
Chief

CONFIDENTIAL

CONFIDENTIAL

ACTIV-GM

SUBJECT: Additional Armament for the M113 in Vietnam

DISTRIBUTION:

CG, US Army Combat Developments Command, Ft Belvoir, Va.
CG, US Army Materiel Command, Wash 25, D. C.
Commandant, US Army Infantry School, Ft Benning, Ga.
Commandant, US Army Armor School, Ft Knox, Ky.
CG, US Army Mobility Command, Centerline, Michigan
CG, US Army Ordnance Center & School, Aberdeen Proving Ground, Md.
CG, US Army Test & Evaluation Command, Aberdeen Proving Ground, Md.
CO, Combat Developments Command, Special Warfare Agency, Ft Bragg, NC
CO, US Army Infantry Board, Ft Benning, Ga.
CO, US Army Armor Board, Ft Knox, Ky.
ACTIV Liaison Officer, ACSFOR, Wash 25, D.C.
Director, JOEG-V/ARPA, APO 143, U.S. Forces

CONFIDENTIAL

CONFIDENTIAL



Figure 1

M1919A4 machine gun mounted with web straps to top deck of M113. The antenna guard and footman loops (small aluminum tiedown brackets) are used for tiedown. The same tiedown arrangement is used for mounting the gun on the right side of the cargo hatch.

CONFIDENTIAL

CONFIDENTIAL



Figure 2
M1919A4 machine gun strapped to the top deck of the M113.
The antenna guard is missing in this vehicle. The vehicle's
footman loops and web straps were used to effect the tiedown.

CONFIDENTIAL

CONFIDENTIAL

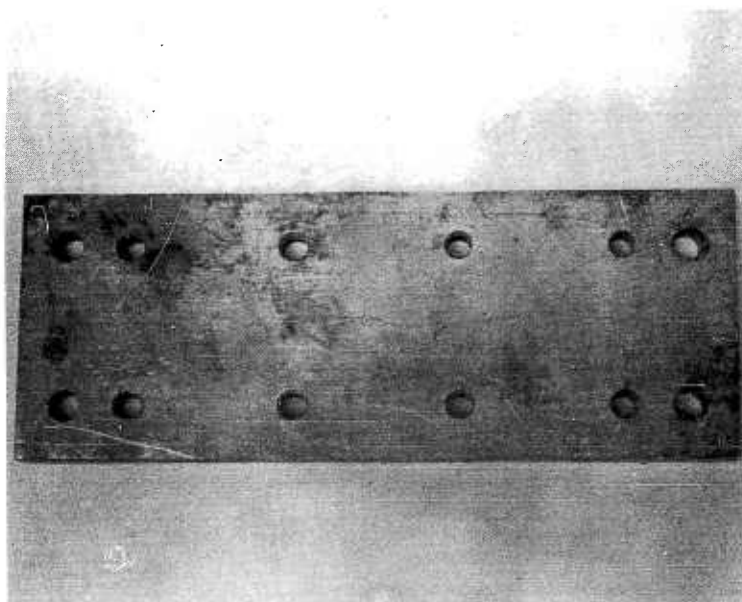


Figure 3
Three-position pedestal mount base.

CONFIDENTIAL

CONFIDENTIAL

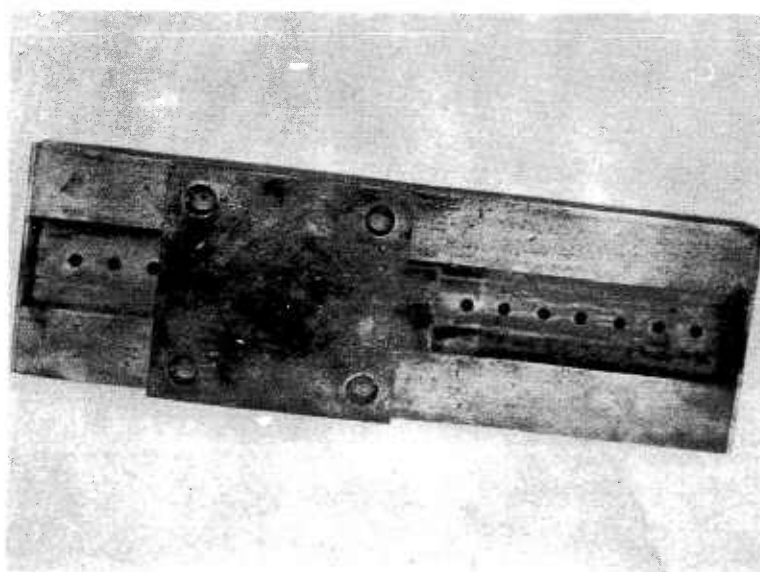


Figure 4
Slotted adapter.

CONFIDENTIAL

CONFIDENTIAL



Figure 5
Standard support assembly - Arrow A.
Modified support assembly - Arrow B.

CONFIDENTIAL

CONFIDENTIAL

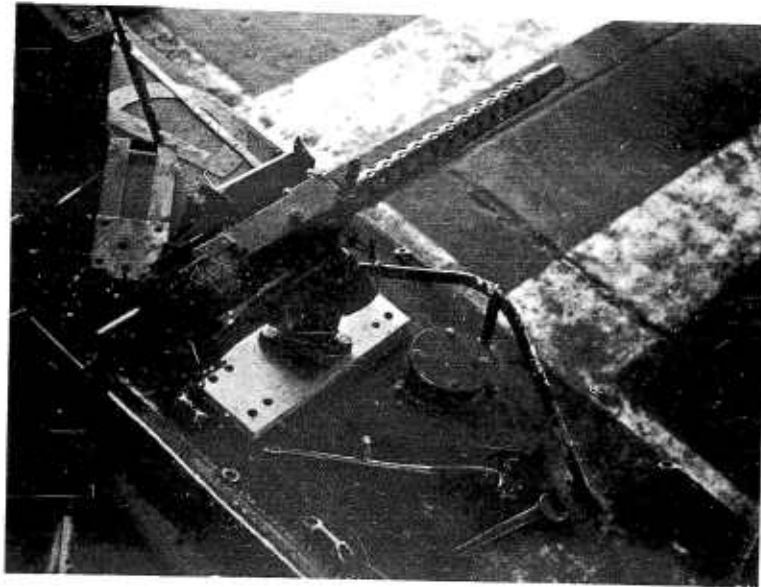


Figure 6
M1919A4 mounted on position pedestal mount base. A support assembly reduced one inch in height is used (See B in Figure 5).

CONFIDENTIAL

CONFIDENTIAL



Figure 7
Fabricated pintle assembly used to adapt the
M60 machine gun to a support assembly.

CONFIDENTIAL

CONFIDENTIAL

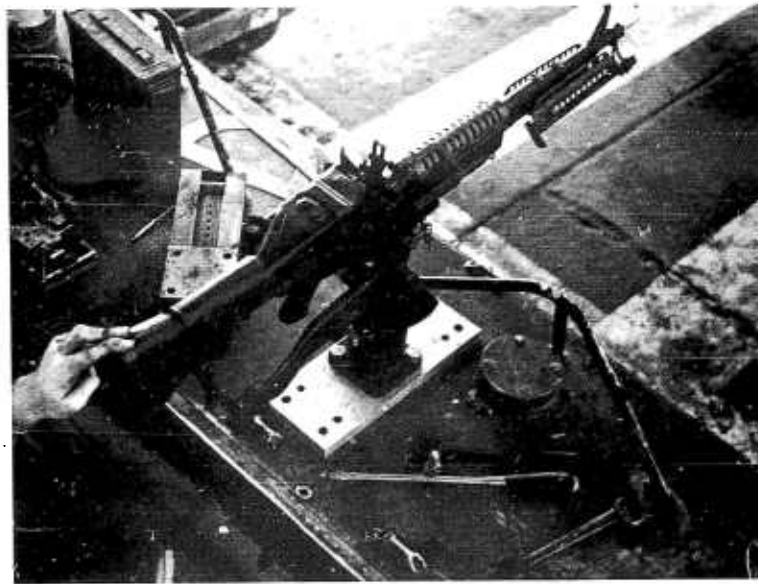


Figure 8
M60 machine gun and modified support assembly mounted
on the three-position pedestal mount base.

CONFIDENTIAL

CONFIDENTIAL


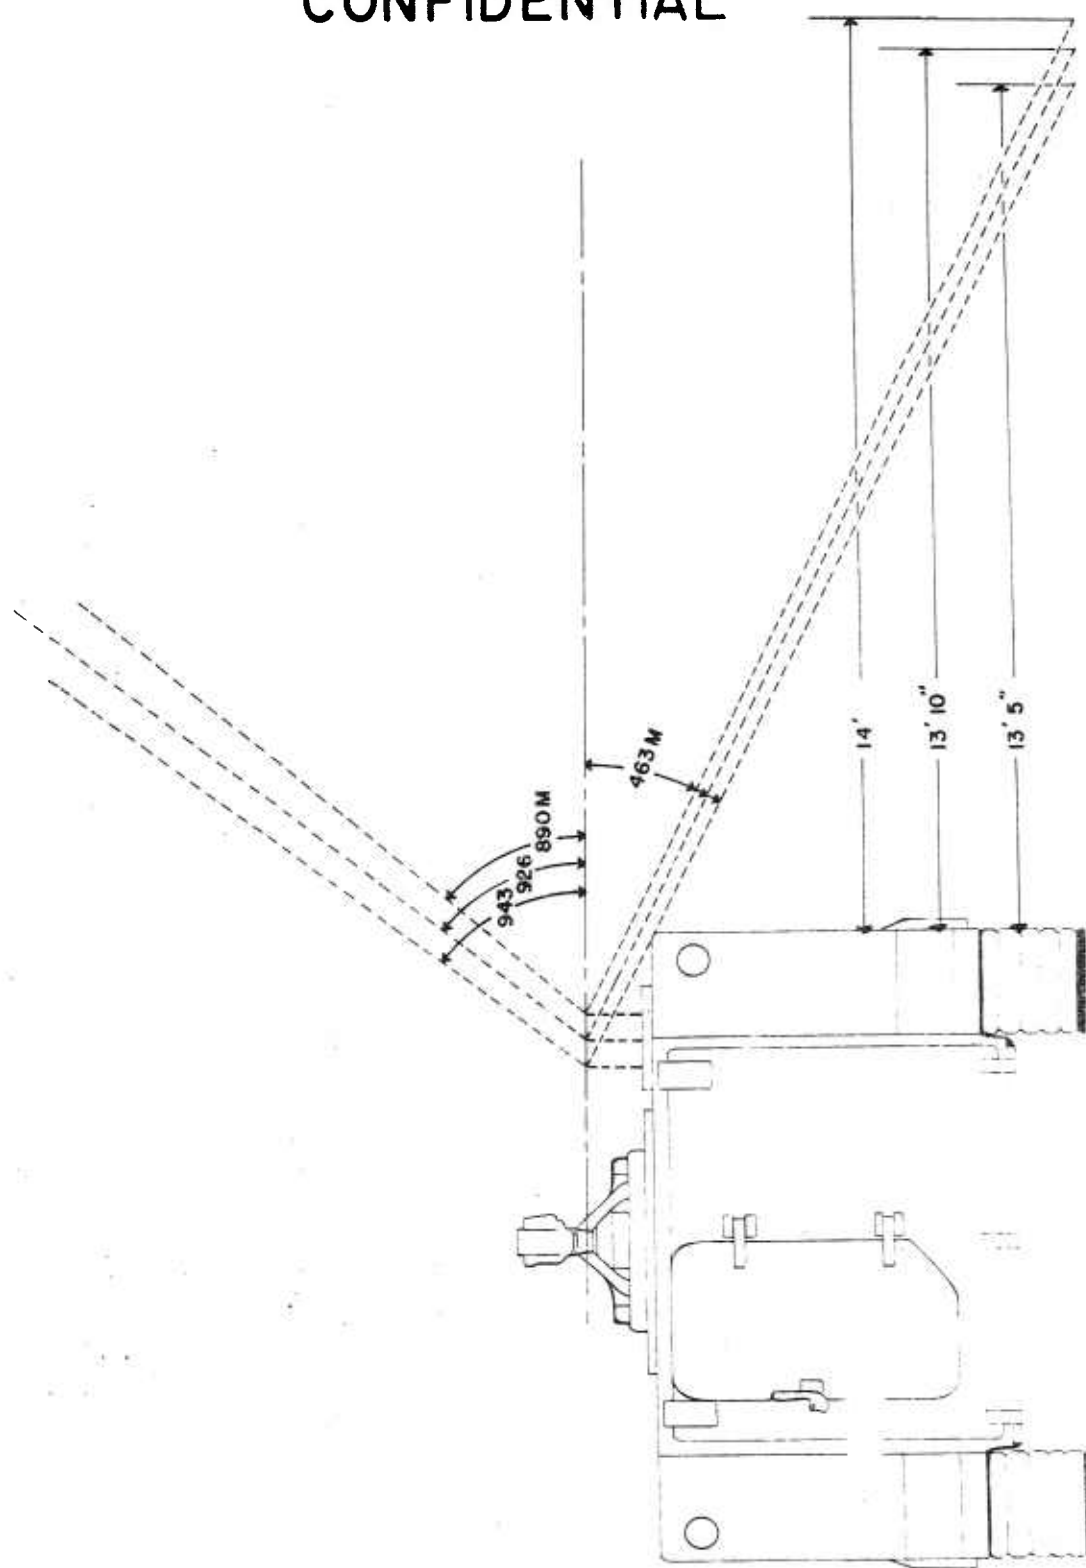


FIGURE 9

CONFIDENTIAL

CONFIDENTIAL

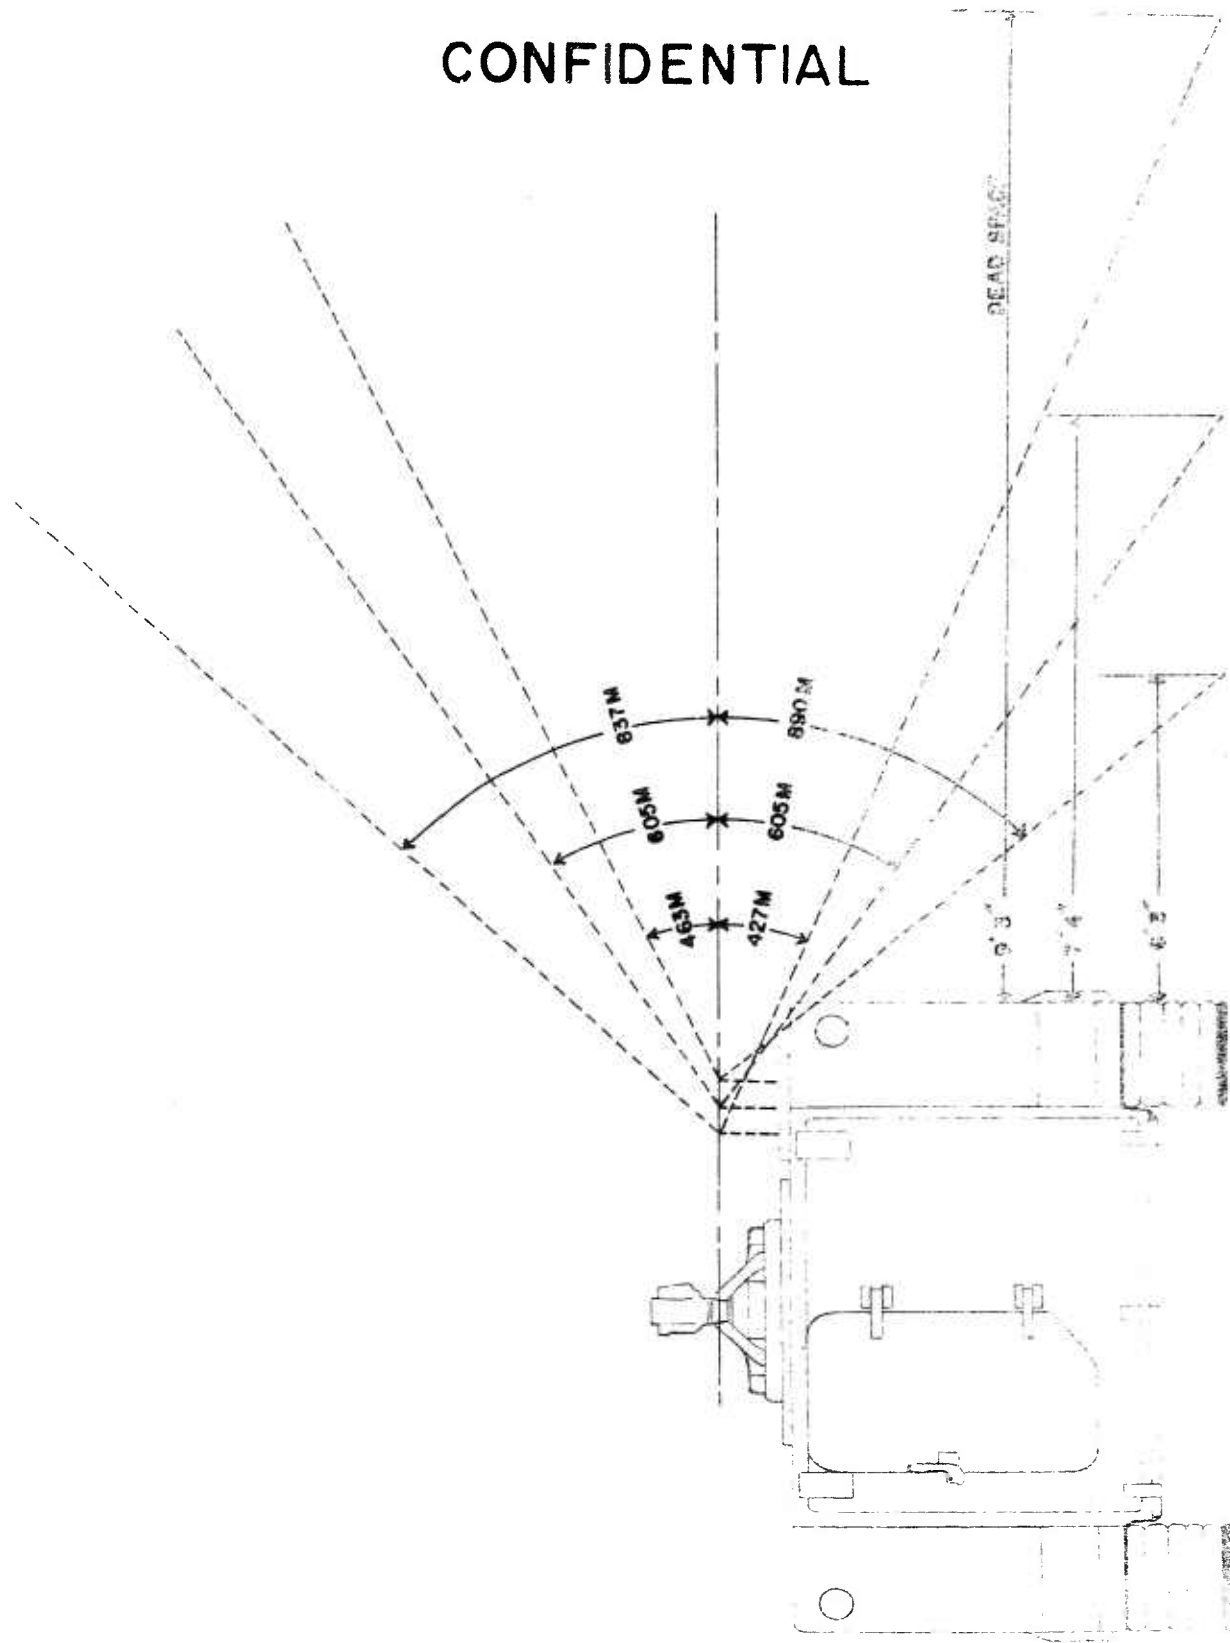

CONFIDENTIAL

CONFIDENTIAL


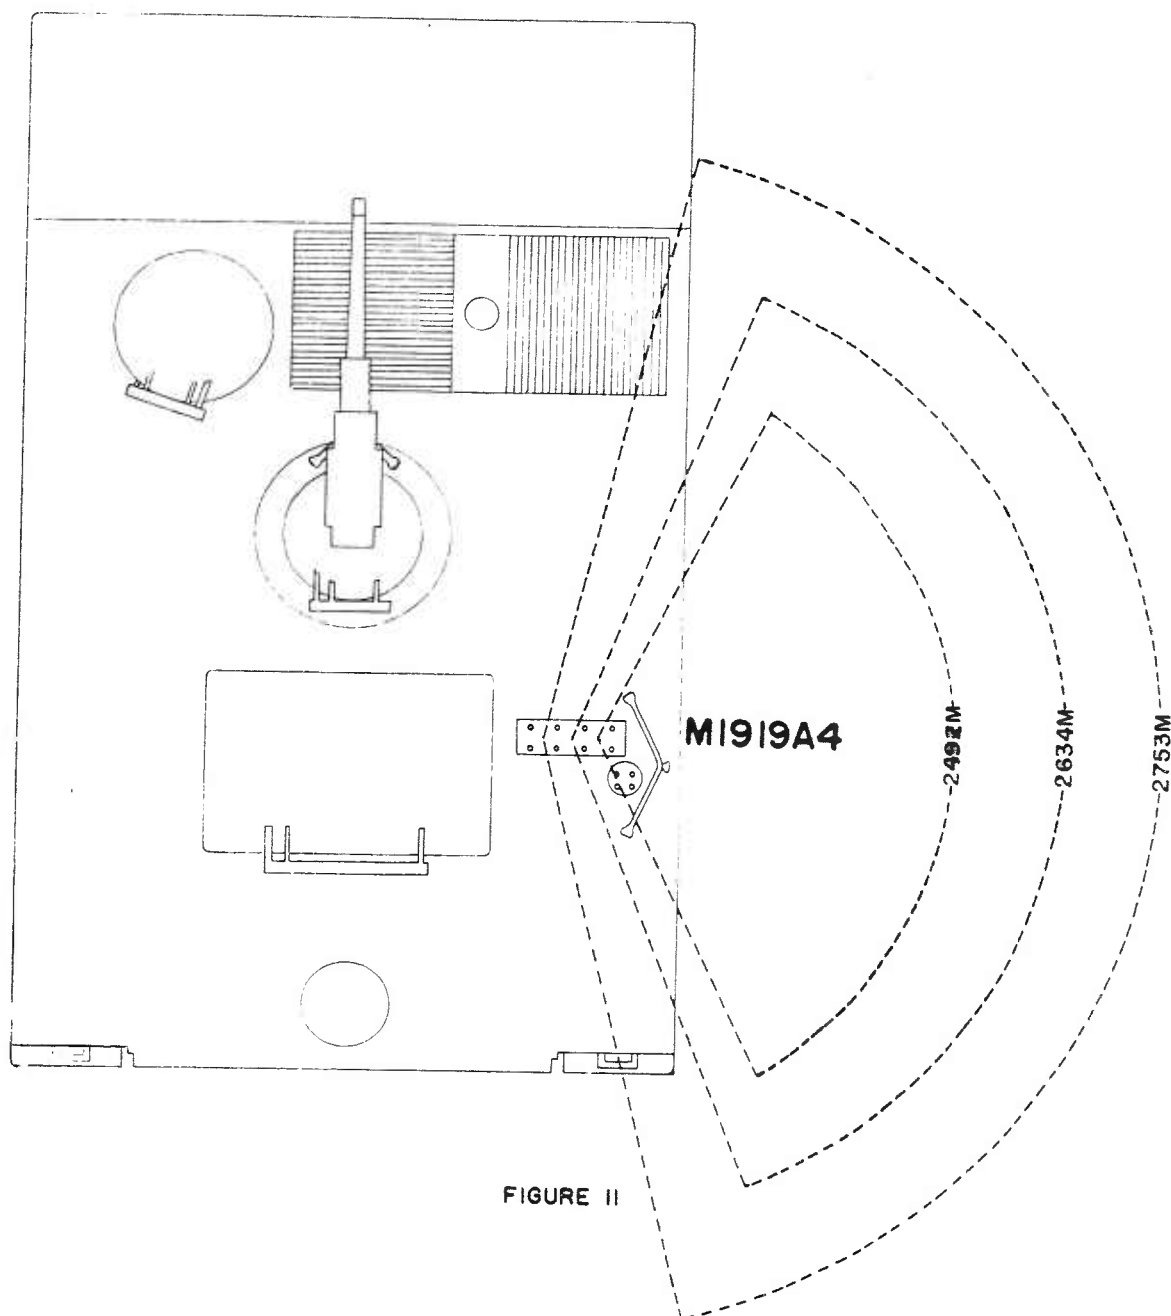


FIGURE II

CONFIDENTIAL

CONFIDENTIAL

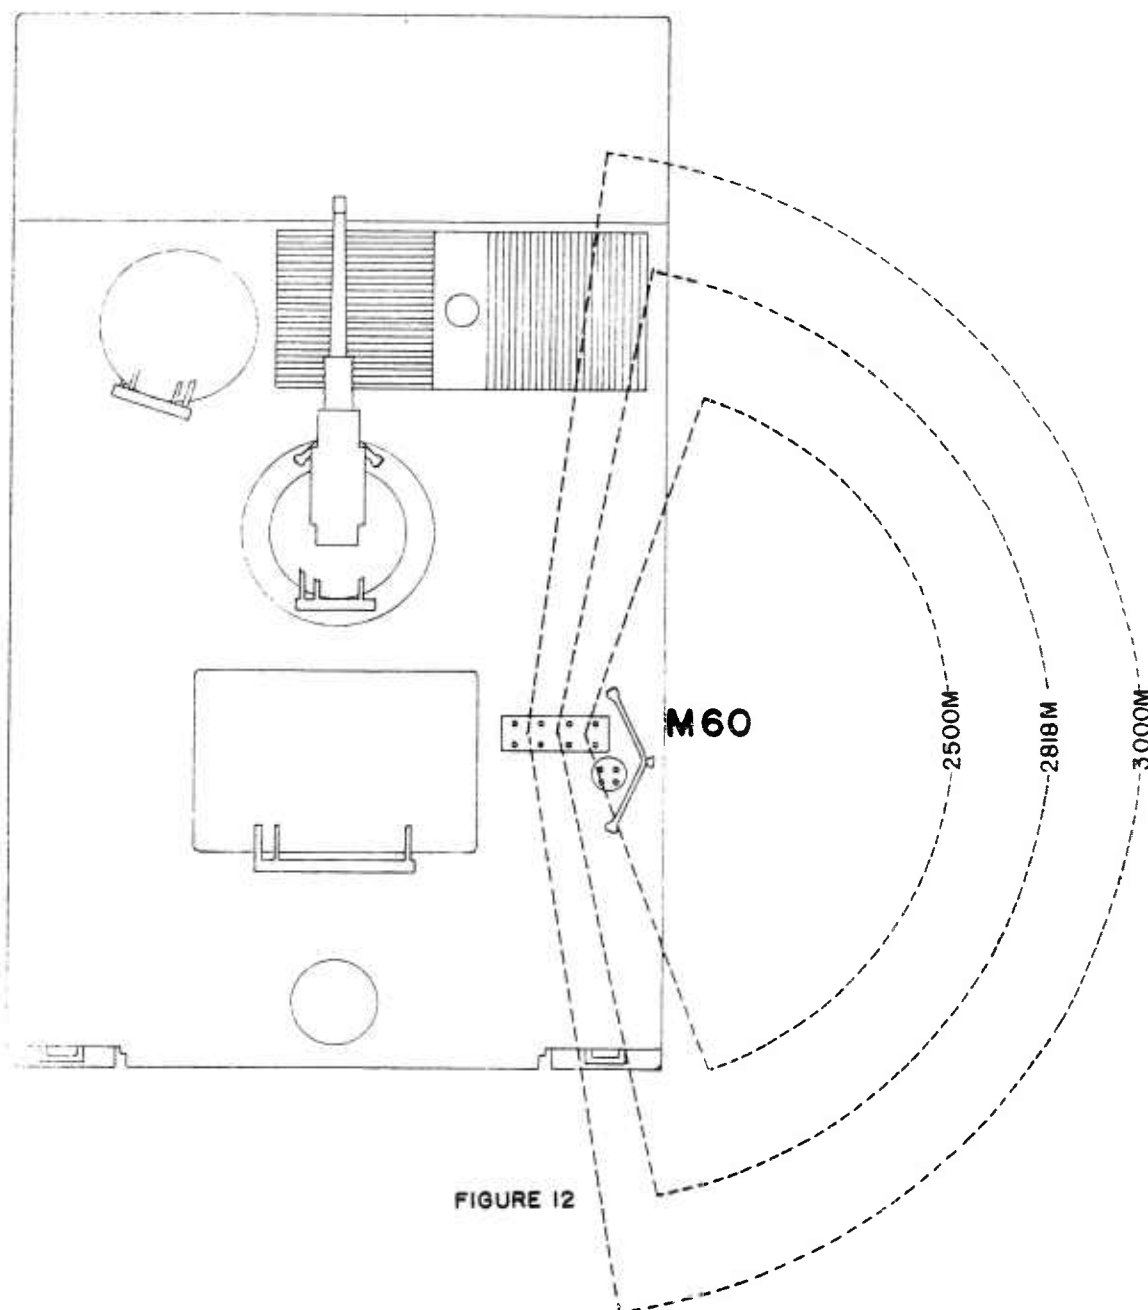

CONFIDENTIAL

CONFIDENTIAL

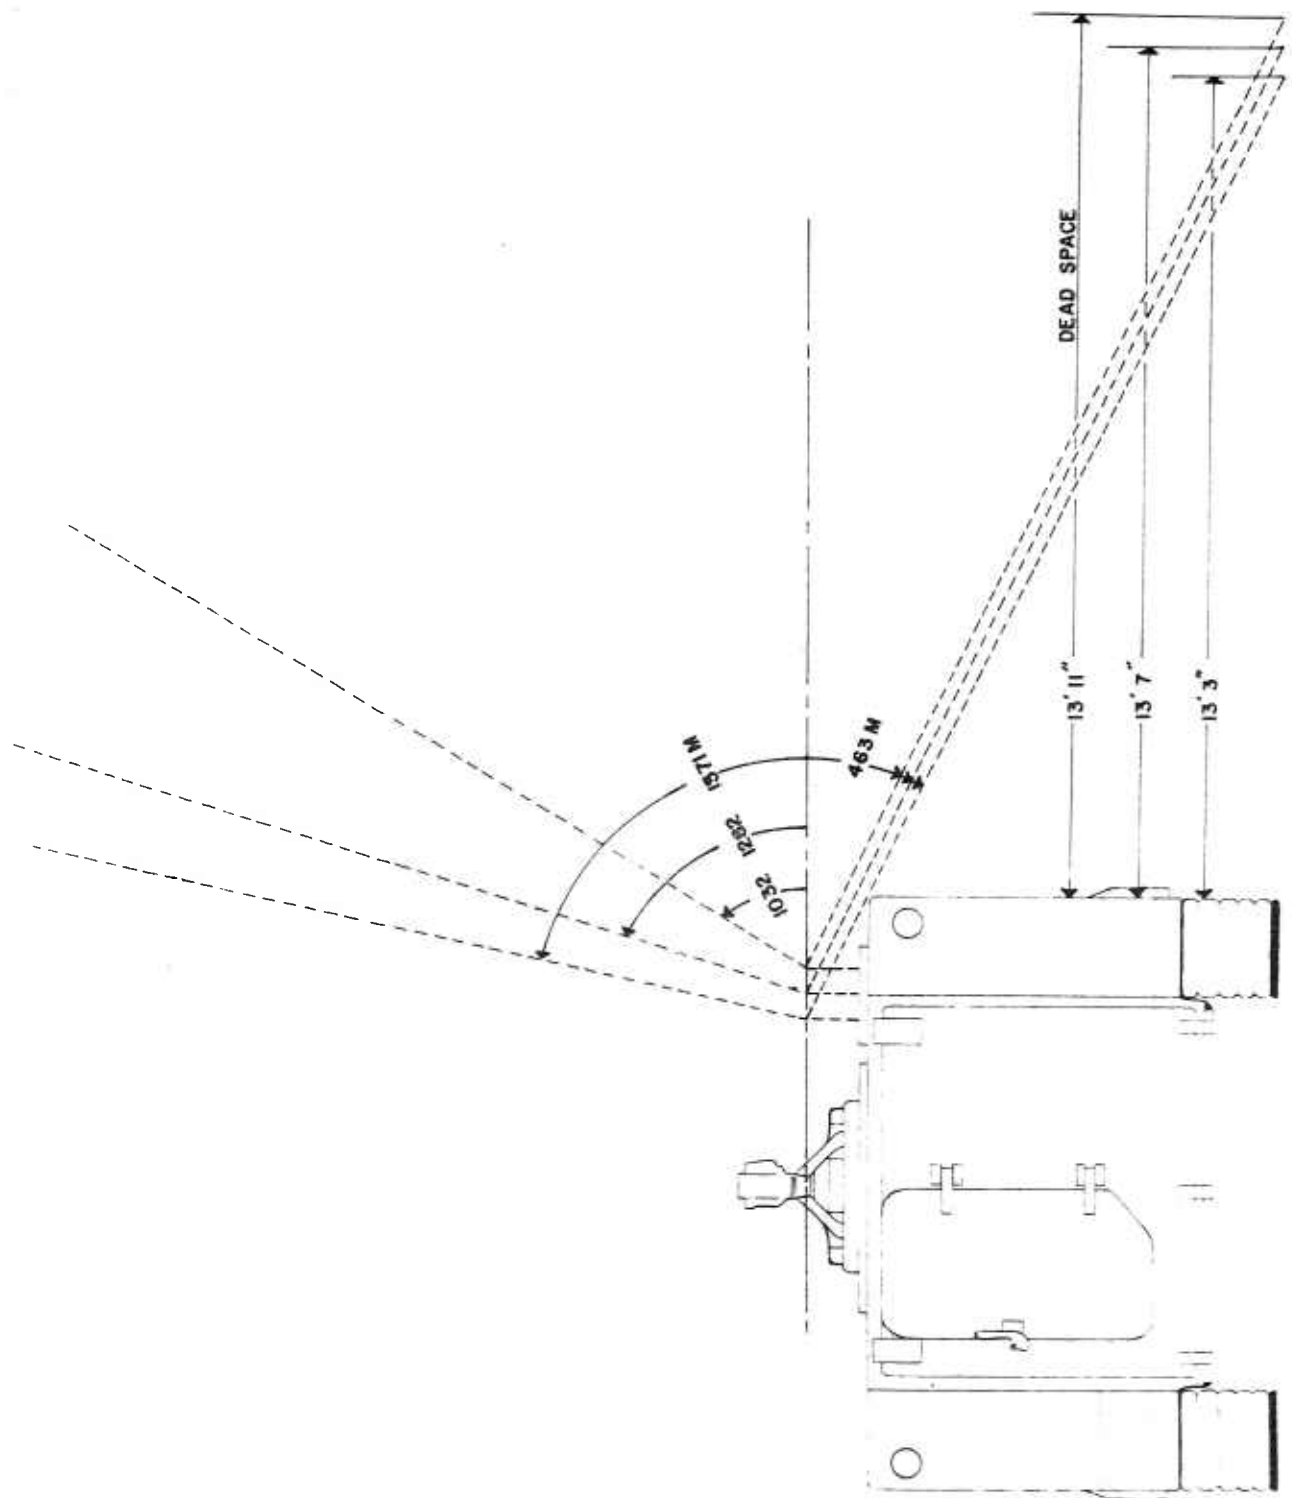


FIGURE 13

CONFIDENTIAL

CONFIDENTIAL

M60 SLOTTED ADAPTER


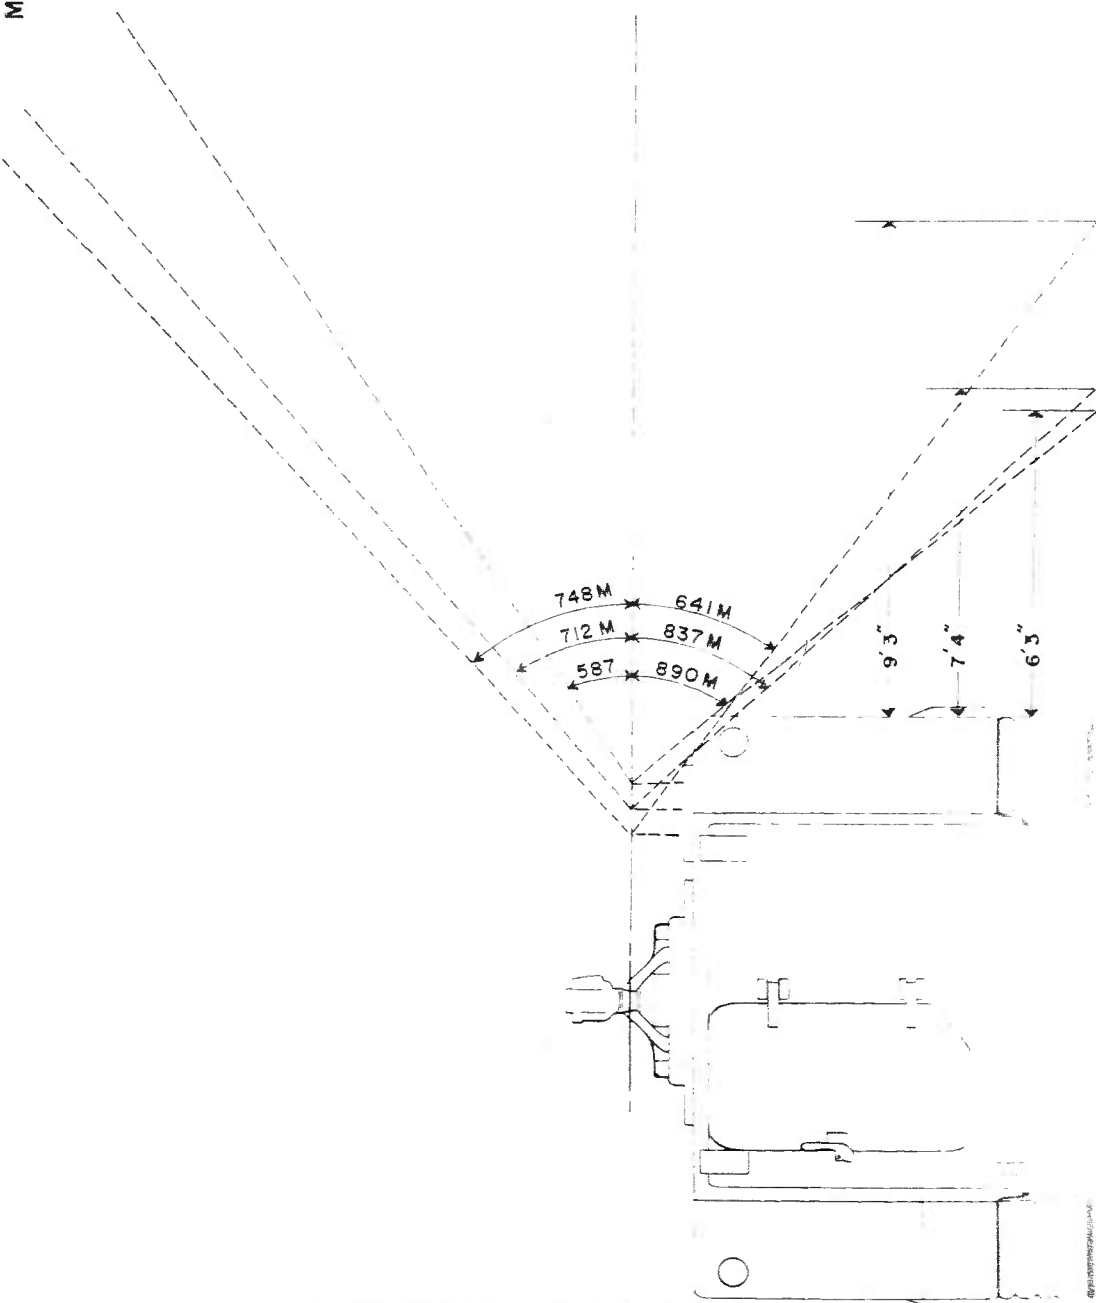


FIGURE 14


CONFIDENTIAL

CONFIDENTIAL

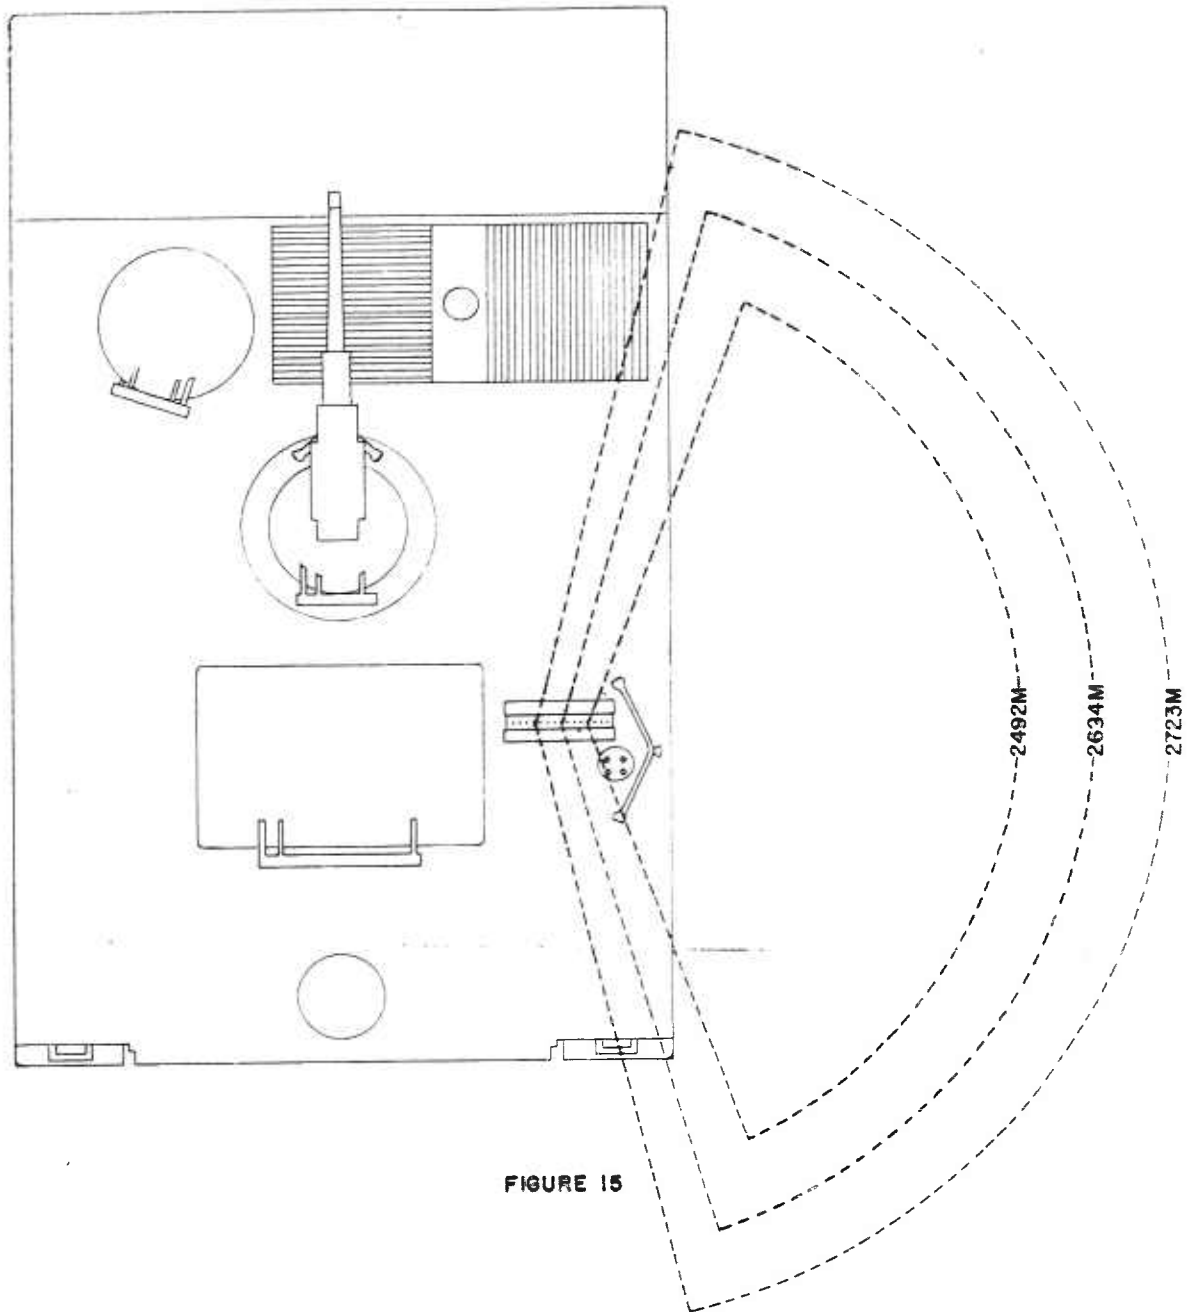

CONFIDENTIAL

CONFIDENTIAL

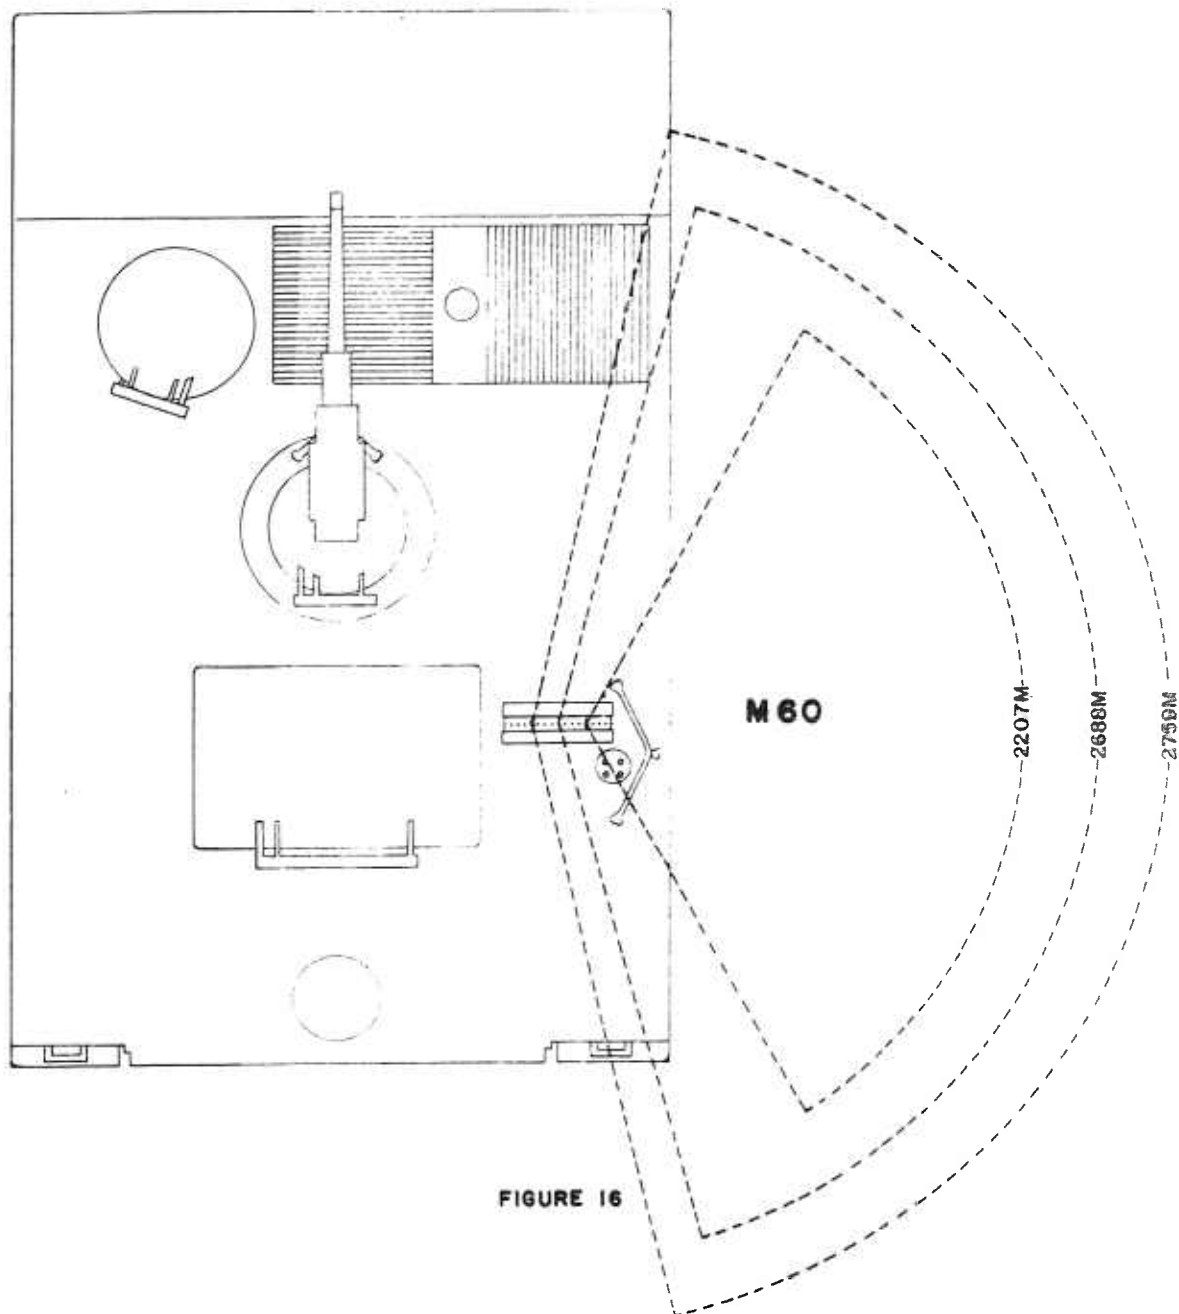

CONFIDENTIAL

CONFIDENTIAL

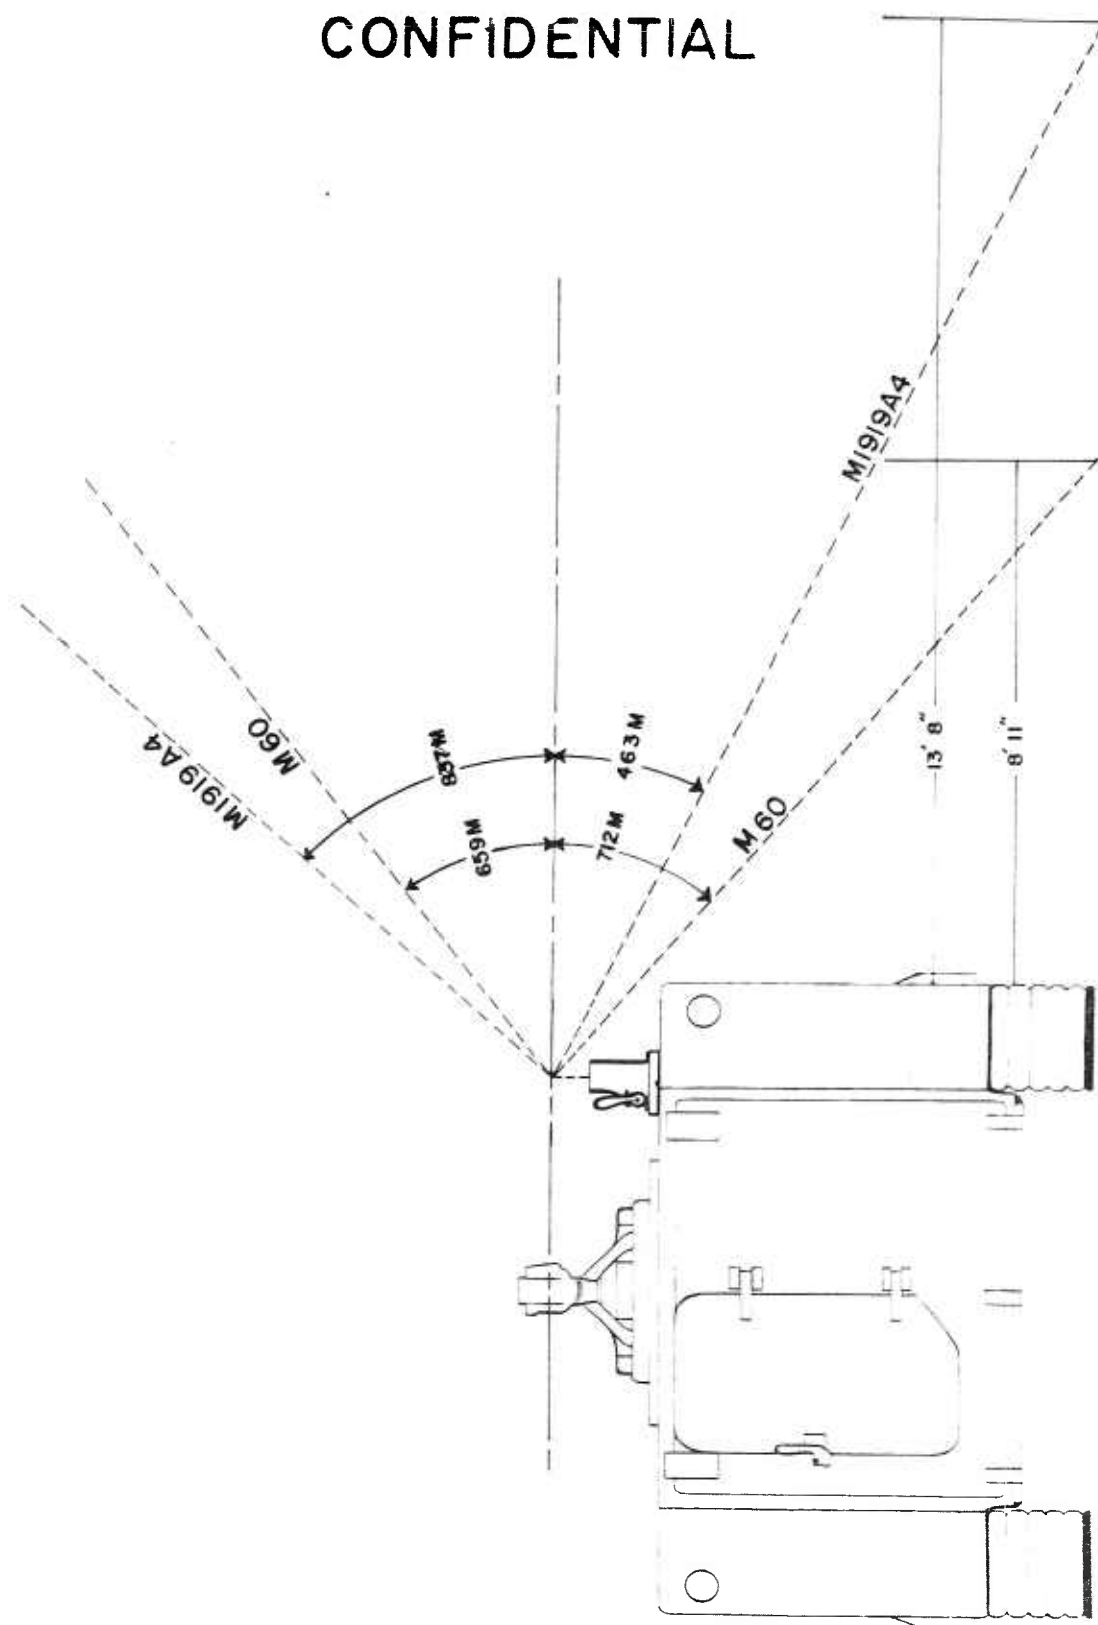


FIGURE 17

CONFIDENTIAL

CONFIDENTIAL

STD SUPPORT ASSEMBLY

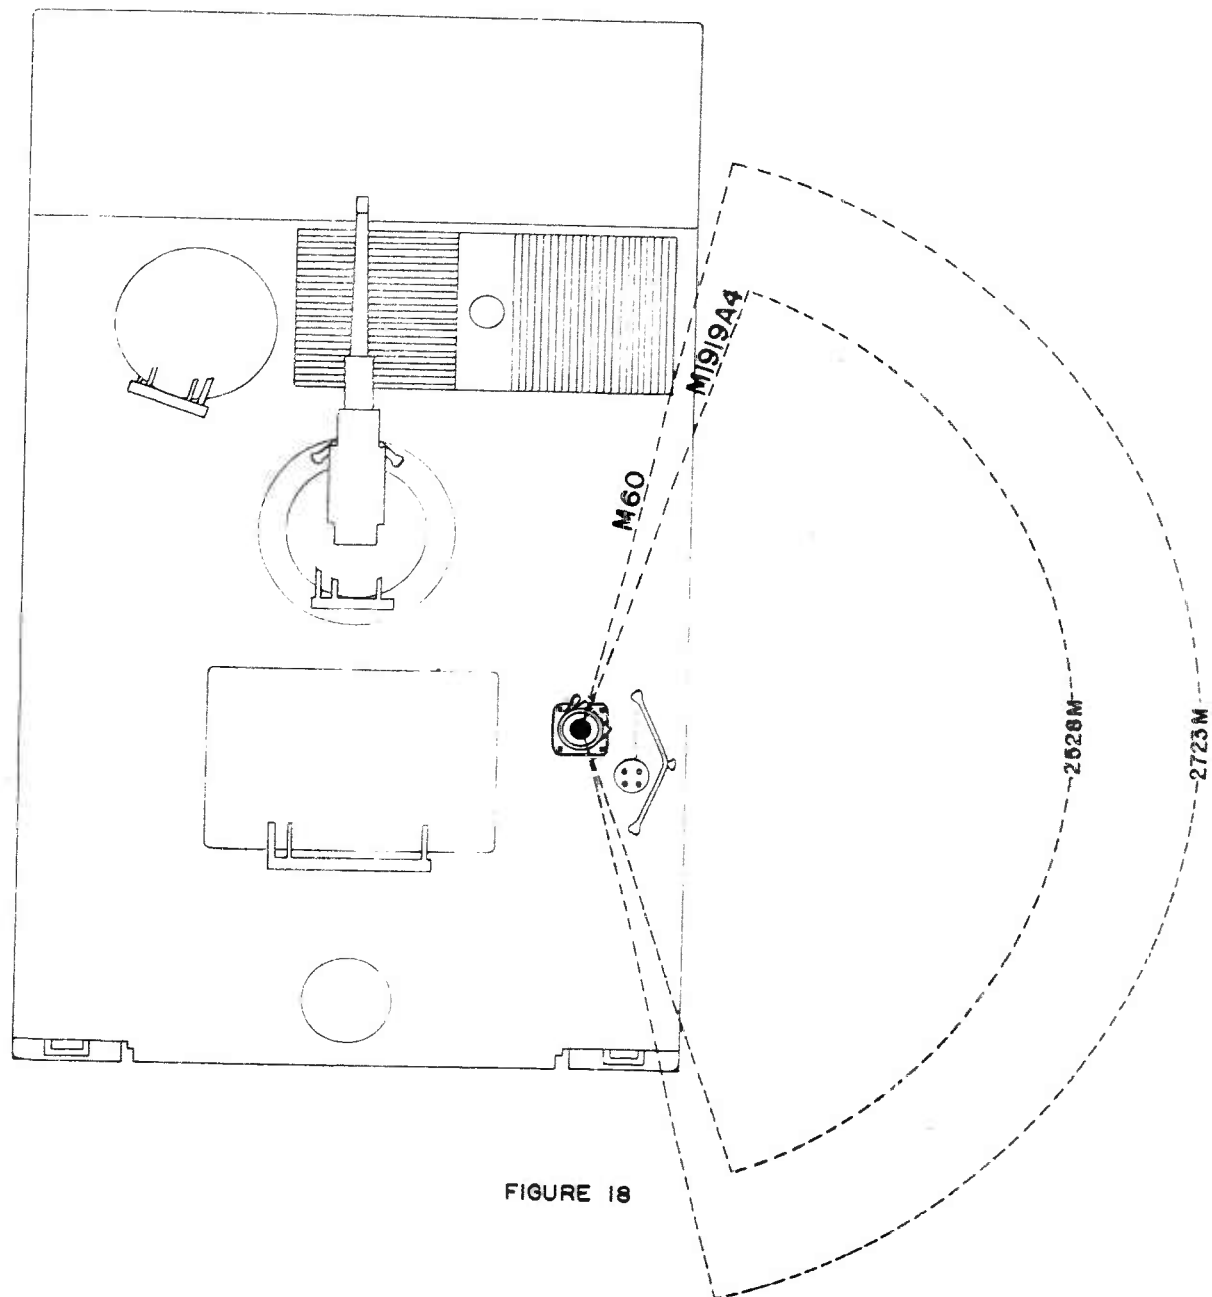


FIGURE 18

CONFIDENTIAL